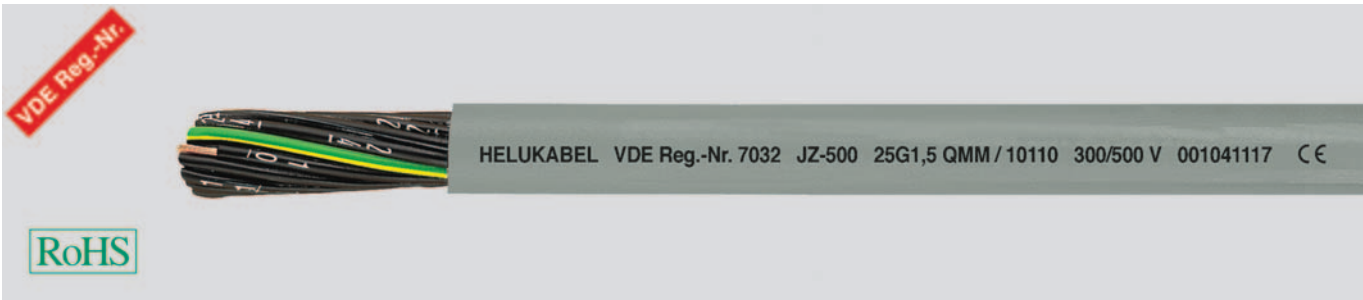


JZ-500 flexible, number coded, meter marking**Technical data**

- Special-PVC control cable adapted to DIN VDE 0285-525-2-51 / DIN EN 50525-2-51
- **Temperature range**
flexing -15°C to +80°C
fixed installation -40°C to +80°C
- **Nominal voltage** U_0/U 300/500 V
- **Test voltage** 4000 V
- **Breakdown voltage** min. 8000 V
- **Insulation resistance**
min. 20 MOhm x km
- **Minimum bending radius**
flexing 7,5x cable Ø
fixed installation 4x cable Ø
- **Radiation resistance**
up to 80x10⁶ cJ/kg (up to 80 Mrad)

Cable structure

- Bare copper-conductor, to DIN VDE 0295 cl.5, fine-wire, BS 6360 cl.5, IEC 60228 cl.5
- Core insulation of special PVC compound type Z 7225
- Core identification to DIN VDE 0293 black cores with continuous white numbering (also available in other colours on request)
- GN-YE conductor, 3 cores and above in the outer layer
- Cores stranded in layers with optimal lay-length
- Outer sheath of special PVC compound type TM2 to DIN VDE 0207-363-4-1 / DIN EN 50363-4-1
- Sheath colour grey (RAL 7001)
- with meter marking

Properties

- Extensively oil resistant, oil-/chemical resistance see table Technical Informations
- conditional drag chain compatible
- conditional suitability for torsion
- The materials used in manufacture are cadmium-free and contain no silicone and free from substances harmful to the wetting properties of lacquers

Tests

- PVC self-extinguishing and flame retardant acc. to DIN VDE 0482-332-1-2, DIN EN 60332-1-2, IEC 60332-1 (equivalent DIN VDE 0472 part 804 test method B)

Note

- G = with green-yellow conductor
x = without green-yellow conductor (OZ)
- We supply any "desired length" of stranded cores without outer sheath, core insulation colour acc. RAL 9005 with number combination acc. customers requirement.
- Please note the cleanroom qualification when ordering.
- AWG sizes are approximate equivalent values. The actual cross-section is in mm².
- screened analogue type:
F-CY-JZ, confer page 50
F-CY-OZ (LiY-CY), confer page 48
Y-CY-JB, confer page 62
Y-CY-JZ, confer page 53

Application

These cables are used for flexible use for medium mechanical stresses with free movement without tensile stress or forced movements in dry, moist and wet rooms but not suitable for open air, as measuring and control cables in tool machines, conveyor belts, production lines in machinery production, in air-conditioning and in steel production.

Selected PVC-compounds guarantee a good flexibility as well as an economic and fast installation.

CE = The product is conformed with the EC Low-Voltage Directive 2006/95/EC.

Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.	Part no.	No. cores x cross-sec. mm ²	Outer Ø approx. mm	Cop. weight kg / km	Weight approx. kg / km	AWG-No.
10001	2 x 0,5	4,8	9,6	40,0	20	10025	50 G 0,5	17,5	240,0	513,0	20
10002	3 G 0,5	5,1	14,4	46,0	20	10169	52 G 0,5	17,5	252,0	534,0	20
10003	3 x 0,5	5,1	14,4	46,0	20	10026	61 G 0,5	18,5	293,0	625,0	20
10004	4 G 0,5	5,5	19,0	56,0	20	10027	65 G 0,5	19,4	312,0	682,0	20
10005	4 x 0,5	5,5	19,0	56,0	20	10028	80 G 0,5	21,4	384,0	780,0	20
10006	5 G 0,5	6,2	24,0	65,0	20	10029	100 G 0,5	24,0	480,0	980,0	20
10007	5 x 0,5	6,2	24,0	65,0	20	10030	2 x 0,75	5,3	14,4	46,0	19
10008	6 G 0,5	6,7	29,0	75,0	20	10031	3 G 0,75	5,6	21,6	54,0	19
10009	7 G 0,5	6,7	33,6	80,0	20	10032	3 x 0,75	5,6	21,6	54,0	19
10010	7 x 0,5	6,7	33,6	80,0	20	10033	4 G 0,75	6,3	28,8	66,0	19
10011	8 G 0,5	7,4	38,0	97,0	20	10034	4 x 0,75	6,3	29,0	66,0	19
10172	8 x 0,5	7,4	38,0	97,0	20	10035	5 G 0,75	6,9	36,0	80,0	19
10012	10 G 0,5	8,3	48,0	116,0	20	10036	5 x 0,75	6,9	36,0	80,0	19
10013	12 G 0,5	8,7	58,0	135,0	20	10037	6 G 0,75	7,5	43,0	99,0	19
10014	12 x 0,5	8,7	58,0	135,0	20	10177	6 x 0,75	7,5	43,0	99,0	19
10015	14 G 0,5	9,5	67,0	150,0	20	10038	7 G 0,75	7,5	50,0	110,0	19
10183	16 G 0,5	10,0	76,0	175,0	20	10039	7 x 0,75	7,5	50,0	110,0	19
10016	18 G 0,5	10,7	86,0	196,0	20	10040	8 G 0,75	8,3	58,0	130,0	19
10017	20 G 0,5	11,3	96,0	215,0	20	10173	8 x 0,75	8,3	58,0	130,0	19
10018	21 G 0,5	11,3	101,0	240,0	20	10041	9 G 0,75	8,9	65,0	153,0	19
10019	25 G 0,5	12,6	120,0	270,0	20	10042	10 G 0,75	9,2	72,0	162,0	19
10020	30 G 0,5	13,5	144,0	310,0	20	10043	12 G 0,75	9,8	86,0	179,0	19
10021	32 G 0,5	14,0	154,0	323,0	20	10044	12 x 0,75	9,8	86,0	179,0	19
10022	34 G 0,5	14,3	163,0	362,0	20	10045	14 G 0,75	10,6	101,0	214,0	19
10023	40 G 0,5	15,3	192,0	434,0	20	10046	15 G 0,75	11,4	108,0	218,0	19
10024	42 G 0,5	15,8	202,0	449,0	20	10047	18 G 0,75	12,2	130,0	257,0	19

Continuation ▶